
T40RT/T46JRT TELESCOPIC BOOM LIFT



- Mid-size diesel telescopic boom lifts
- Available with and without a jib boom
- Oscillating axle and 4 wheel drive for excellent rough terrain performance
- Simple to operate and maintain
- Ideal for construction and industrial applications

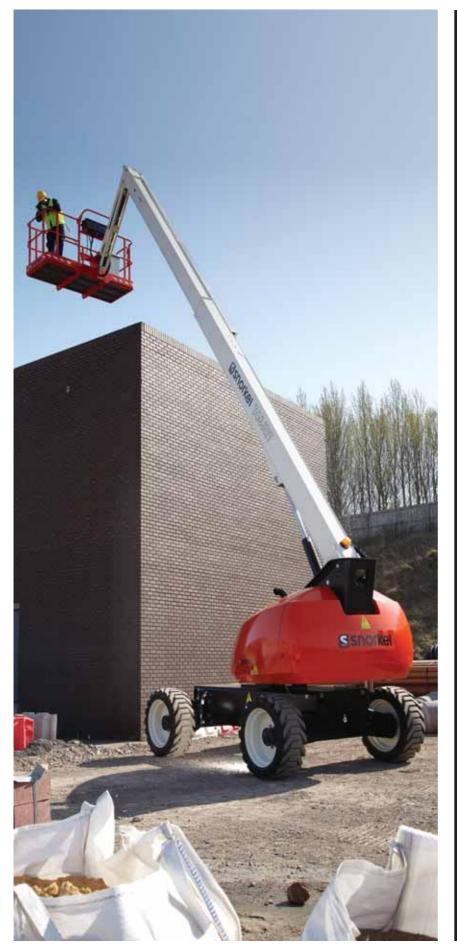

TELESCOPIC BOOM LIFT

DIMENSIONS	T40RT	T46JRT
Max. working height	14.2m	16.0m
Max. platform height (A)	12.2m	14.0m
Max. working outreach	10.1m	12.2m
Platform size	2.44m x 1.0m	2.44m x 1.0m
Overall width (B)	2.44m	2.44m
Stowed length (C)	7.57m	8.6m
Stowed height (D)	2.4m	2.4m
Wheelbase	2.44m	2.44m
Ground clearance	360mm	360mm

PERFORMANCE

Platform capacity	272kg	227kg	
Max. drive height	12.2m	14.0m	
Max. drive speed (stowed)	7.25km/h	7.25km/h	
Max. drive speed (elevated)	1.1km/h	1.1km/h	
Jib length	n/a	1.8m	
Jib arc	n/a	136°	
Raise/lower time	64/64 sec	64/64 sec	
Gradeability	45%	40%	
Inside turning radius	1.37m	1.37m	
Outside turning radius	4.57m	4.57m	
Tyres	355/55 D625 high grip, poly-filled		
Controls	proportional drive, raise and slew		
Drive system	4 wheel drive with oscillating axle		

POWER


Power source	Kubota V1505T diesel 44.2Hp		
Auxillary power unit	12V DC	12V DC	


WEIGHT

Gross weight

6,486kg

WORKING ENVELOPE

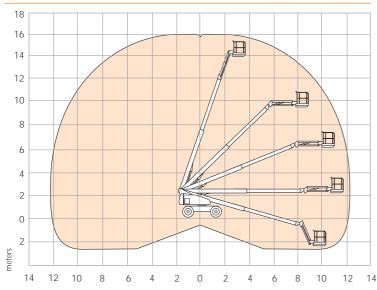



STANDARD FEATURES

- 4 wheel drive
- Oscillating axle
- Swing-out engine tray •
- Tilt alarm and cut-out .
- Horn •
- Power line to platform (no sockets) .
- Hour meter •
- DC emergency operation
- Three entry cage •
- Flashing amber beacon •
- CE approved •

OPTIONS

7,030kg

- Special paint colours
- 1.82m x 0.99m cage
- Platform work lights •
- Hydraulic generator •
- Compressed airline to platform •
- Steel cowling covers •
- Cold weather package •
- Extreme cold weather package •
- 12k generator package •
- 12k generator/welder package



e: sales@snorkellifts.com

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate Snorkel operators manual for detailed instructions on the proper use and maintenance.

T40RT/T46JRT