



CE MODELS | SJ 8831 SJ 8841



FULL SIZE SERIES Rough Terrain SCISSOR LIFTS

Skyjack's Full-Size Series Rough Terrain Scissor Lifts deliver huge platforms, soaring work heights and heavy duty capacities— all in one package!

The SJ 8831 and SJ 8841 feature working heights of 11,4 m and 12,5 m respectively. Both models are drivable at full height, with capacities ranging to 1134 kg allowing for maximized productivity.


As with every Skyjack model, these units use an analog based control system, featuring Skyjack's standard colour coded and numbered wiring, for ease of troubleshooting.



FULL-SIZE SERIES

Rough Terrain Scissor Lifts

| Specifications | SJ 8831 | SJ 8841 |
|---|----------|----------|
| A Work Height | 11,4 m | 14,5 m |
| B Raised Platform Height | 9,4 m | 12,5 m |
| C Lowered Platform Height | 1,5 m | 1,8 m |
| D Overall Width | 2,2 m | 2,2 m |
| E Overall Length | 3,5 m | 3,5 m |
| F Stowed Height (Rails Up) | 2,7 m | 2,9 m |
| G Stowed Height (Rails Down) | 2,0 m | 2,2 m |
| H Platform Width (Inside Dimension) | 1,7 m | 1,7 m |
| I Platform Length (Inside Dimension) | 3,4 m | 3,4 m |
| Ground Clearance | 0,2 m | 0,2 m |
| Wheelbase | 2,3 m | 2,3 m |
| Weight | 4804 kg | 5212 kg |
| Gradeability | 30% | 30% |
| Turning Radius (Inside) | 4,0 m | 4,0 m |
| Turning Radius (Outside) | 6,3 m | 6,3 m |
| Lift Time (With Rated Load) | 58 sec | 56 sec |
| Drive Speed (Stowed) | 5,6 km/h | 5,6 km/h |
| Drive Speed (Raised) | 1 km/h | 1 km/h |
| Maximum Drive Height | 7,9 m | 7,9 m |
| Capacity (Overall) | 1134 kg | 771 kg |
| Maximum # of Persons | 6 | 5 |

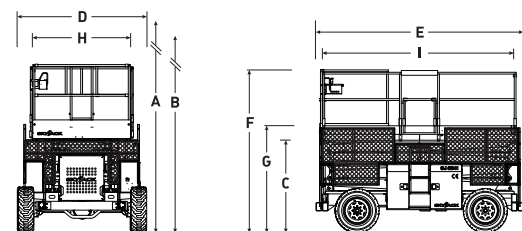

| Model | Capacity With 1 Extension Deck* | | Capacity With 2 Extension Decks* | | |
|---------|---------------------------------|------------|----------------------------------|------------|-----------|
| | Main | Front Ext. | Main | Front Ext. | Rear Ext. |
| SJ 8831 | 680 kg | 227 kg | 317 kg | 227 kg | 227 kg |
| SJ 8841 | 454 kg | 227 kg | 227 kg | 227 kg | 227 kg |

STANDARD FEATURES

- Axle based 4WD
- “No Spin” rear differential and limited slip front different
- Disc brake system on rear axle
- 29hp Kubota Diesel engine on roll out tray
- Self-centering scissor design allows optional extension decks to be added to one or both ends
- Analog control system
- Colour coded and numbered wiring system
- 30% Gradeability
- Grip lug, foam-filled tires
- Wiring for AC outlet on platform
- Tilt alarm with drive & lift cut-out
- All motion audible alarm
- Overload sensing system
- Flashing light
- Operator horn
- Fold down hinged railing system
- Half height spring hinged gates on sides
- Lanyard attachment points
- Scissor guards
- Tie down/lift lugs

OPTIONS†

- 1,2 m roll out extension deck (single or dual)
- 1,2 m powered extension deck (single or dual)
- Independent/auto leveling outriggers
- Diesel scrubber
- Shop airline to platform
- 3.5kW hydraulic generator
- Full height spring hinged gates
- Non-marking grip lug foam-filled tyres

† Capacities, and machine weights may differ when options are added

PROLIFT Access Ltd

☎: 0845 3664755
E: info@proliftaccess.co.uk,
W: www.proliftaccess.co.uk